



11/19/99



UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

36J.P247

First Named Inventor or Application Identifier

TODD NEWMAN

Express Mail Label No.

EJ718335817US

jc588 U.S. PTO
09/443796

11/19/99

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 323. ☒ Drawing(s) (35 USC 113) Total Sheets 74. ☐ Oath or Declaration Total Pages a. ☐ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4c, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein."Express Mail" mailing label number EJ718335817USDate of Deposit November 19, 1999I hereby certify that this paper or fee is being deposited with
the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above
and is addressed to the Commissioner of Patents and Trademarks,
Washington, D. C. 20231.Edward Kmett

(Typed or printed name of person mailing paper or fee)

[Signature]
(Signature of person mailing paper or fee)6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☒ Information Disclosure Statement (IDS)/PTO-1449 54 Copies of IDS Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	72-20 =	52	X \$ 18.00 =	\$936.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	4-3 =	1	X \$ 78.00 =	\$78.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0.00
				BASIC FEE (37 CFR 1.16(a))	\$760.00
			Total of above Calculations =		\$1,774.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,774.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1,774.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Nandu A. Talwalkar (Reg. No. 41,339)
SIGNATURE	
DATE	November 19, 1999

"Express Mail" mailing label number EJ718335817US

Date of Deposit November 19, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D. C. 20231.

Edward Kmett

(Typed or printed name of person mailing paper or fee)

Edward Kmett

(Signature of person mailing paper or fee)

ADJUSTMENT OF COLOR APPEARANCE MODELS

BACKGROUND OF THE INVENTION

5 Field Of The Invention

10 The present invention concerns adjustment, or modification, of the representation of a device's color gamut when that color gamut is expressed in a color appearance space. More particularly, the present invention relates to adjusting a device's color gamut by adjusting the color gamut, in color appearance space, so as to match the appearance of the device's color-neutral axis.

15 Description Of The Related Art

20 A color appearance space defines color coordinates that attempt to describe how colors appear to a viewer, or how such colors are perceived by the viewer. One popular color appearance space is CIECAM97s, whose color coordinates are JCh (cylindrical). These coordinates can also be expressed in rectangular coordinates, called Jab.

One way in which a color appearance space differs from other spaces such as device-independent color spaces (examples of device-independent color spaces include CIEXYZ and CIELAB) is that a color appearance space will attempt to model how a viewer perceives color, taking into account viewing conditions, surround, and background. For example, the same color sample might appear black if seen against a white background or merely dark gray if seen against a black background. A color appearance space would take the difference in background into account, while a device-independent space such as CIEXYZ does not.

Consider a color printer that prints a black color onto a white sheet by a three-color composite process in which cyan, magenta and yellow are simultaneously deposited into the same print area. Current color appearance spaces are flawed in the sense that they would most likely represent the resulting color as being somewhat chromatic. Depending on the hue, current color appearance spaces would indicate that the color was a very dark green or a very dark blue. However, under most viewing conditions and given the white background of the surrounding sheet, most viewers would agree that the resulting color is actually black; accordingly, in an ideal color appearance space the resulting color would register as black exactly.

Moreover, a problem results when measurements of a device's actual output are used to obtain a representation of the device's color gamut in color appearance space. Specifically, actual measurements of the device's output often yield colors in the color appearance space that do not match a viewer's perceptual judgment. Again considering the above example, the actually-measured value of the composite black color, when expressed

in color appearance space, is not an exact black value, even though most viewers would perceive the color as black exactly.

As a result of this situation a problem arises during gamut mapping. Specifically, because black colors expressed in color appearance are not black exactly, bizarre color effects arise during gamut mapping since most gamut mapping is performed in color appearance space. If, for example, gamut mapping compresses colors toward the color-neutral axis (as is the case in most gamut mapping techniques), then the aforementioned black color might be mapped out the back end of the color-neutral axis, resulting in a situation where a perceptual black color would reproduce as dark red.

SUMMARY OF THE INVENTION

The present invention addresses the foregoing by providing a system in which the representation of a device's color gamut is adjusted relative to the device's color-neutral axis. The adjustment is accomplished by outputting sample color patches of the device and converting them from device-dependent space (such as C,M,Y,K) to device-independent color appearance space (such as Jab). The conversion is generally performed by well-known techniques; usually by measuring color values of the patches and mapping them in terms of lightness (J) and two coordinates, a and b, that represent hue and chroma (where a roughly represents red/green, and b roughly represents blue/yellow). The measured values are mapped into a look-up table, which is often referred to as a "forward mapping".

Utilizing this forward mapping, expected values corresponding to device-neutral colors are obtained, thus defining the device's color-neutral axis for any given lightness (J) value. For each

device neutral shade, the forward look-up table is accessed to obtain a corresponding Jab value in the device-independent color appearance space. These values are stored in a one-dimensional three-component look-up table. The table has components for each of J, a, and b. An alternate embodiment of the invention only stores values for the device white and device black.

Any chroma in the representation of the color of device neutrals in color appearance space is a mismatch between the actual perception and perception predicted by the color appearance model.

The mismatch is then backed out of each and every value in the forward look-up table on a cell-by-cell basis. The J value for each cell in the forward look-up table is used to find the corresponding J value in the one-dimensional look-up table (using interpolation if necessary). Corresponding a and b values in the one-dimensional look-up table are then found, and these corresponding a and b values are subtracted from the a and b values in the forward look-up table.

The forward look-up table is thus adjusted so that the color-neutral axis in device-dependent space matches the color-neutral axis in device-independent color appearance space. The adjusted forward look-up table is used in color management systems in applications such as simulating printed output on a CRT display.

The resulting adjusted forward model may then be inverted, so as to yield a mapping from color appearance to device dependent space (such as Jab to CMY), with this "reverse mapping" being used for color output purposes.

In alternate embodiments of the invention the error is not backed out fully for all cells in the grid table, but is adjusted according to some

other scheme. For example, more chromatic colors or lighter colors may be adjusted less than achromatic (or nearly achromatic) colors or darker colors. Such variations may be applied if the full
5 adjustment is found empirically to result in adverse effects on gamut mapping.

Accordingly, in one aspect the invention is a method for adjusting the representation of a device's color gamut in color appearance space by
10 performing forward mapping of sample colors from a device-dependent space to a device-independent color appearance space to obtain forward-mapped device-independent values. Next, mismatch values for perceived device-neutrals are obtained, each
15 mismatch value being the difference between a forward mapped value for the device-neutral and the neutral axis of the color appearance space. Then, each forward-mapped device-independent value is adjusted by utilizing the obtained mismatch value
20 for each corresponding lightness level of device-neutrals in order to obtain an adjusted forward mapping.

By virtue of the foregoing arrangement, the representation of the device's color gamut in color
25 appearance space is adjusted to accord with a user's perceptual judgment.

In other aspects, the invention is computer-executable process steps, a computer-readable medium for storing computer-executable
30 process steps, and an apparatus that performs color image processing, substantially corresponding to the foregoing method.

In additional aspects of the invention, the adjusted forward mapping may be inverted to obtain a
35 reverse mapping, with both the adjusted forward and the reverse mapping being used in a color management module.

This brief summary has been provided so that the nature of the invention may be understood quickly. A more complete understanding of the invention can be obtained by reference to the following detailed description of the preferred embodiments thereof in connection with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a representative view of a computer system in which the present invention may be implemented.

Figure 2 is a detailed block diagram showing the internal architecture of the computer equipment shown in the computer system of Figure 1.

Figure 3 is a flowchart depicting computer executable process steps for adjusting of a color appearance model according to the invention.

Figure 4 shows an example of a sample color patch printout utilized in the invention.

Figure 5 is an example of a multi-dimensional color look-up table utilized in the invention.

Figure 6 is an example of extracting color appearance values from the multi-dimensional color look-up table of Figure 5 to generate a one-dimensional look-up table.

Figure 7 is an example showing how sample points may be adjusted relative to the neutral axis according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In one aspect, the present invention is applied during the development phase of color look-up tables (CLUT's) that are to be used by a color management module in a computer. Color management

modules are generally utilized in computing devices, such as personal computers, to adjust color data during printing operations. The color management module generally accesses color look-up tables stored in the computer in order to perform operations such as color translation and gamut mapping. In further aspects, although the invention is applied during the development phase of the color appearance models, the resulting models are later used by an end user during actual color management sessions.

Figure 1 is a view showing the outward appearance of a representative computing system used during the development phase, including computing equipment and peripherals which may be used in connection with the practice of the present invention. Computing equipment 40 includes host processor 41 which comprises a personal computer (hereinafter "PC"), preferably an IBM PC-compatible computer, although it may be a Macintosh or other computer. Provided with computing equipment 40 are color monitor 43 including display screen 42, keyboard 46 for entering text data and user commands, and pointing device 47. Pointing device 47 preferably comprises a mouse for pointing and for manipulating objects displayed on display screen 42.

Computing equipment 40 includes a computer-readable memory medium such as computer fixed disk 45 and/or floppy disk drive 44. Floppy disk drive 44 provides a means whereby computing equipment 40 can access information, such as image data, computer-executable process steps, application programs, etc. stored on removable memory media. A similar CD-ROM interface (not shown) may be provided for computing equipment 40 through which computing equipment 40 can access information stored on removable CD-ROM media.

Printer 50 is representative of a color output device whose gamut is measured, and an adjusted color appearance model is obtained based on the measurements. Such a printer forms color images on a recording medium such as paper or transparencies or the like. The invention may be practiced with other color output devices, so long as the device is capable of being interfaced to computing equipment 40.

Spectrophotometer 70 measures color values of sample colors and provides the data to computing equipment 40. Utilizing well-known techniques, application programs contained within fixed disk 45, which will be described in more detail with regard to Figure 2, utilize the data to perform the functions of the invention.

Figure 2 is a detailed block diagram showing the internal architecture of host processor 41 of computing equipment 40. As shown in Figure 2, host processor 41 includes central processing unit (CPU) 113 that interfaces with computer bus 114. Also interfacing with computer bus 114 are fixed disk 45, random access memory (RAM) 116 for use as main memory, read only memory (ROM) 117, floppy disk interface 119, display interface 120 to monitor 43, keyboard interface 122 to keyboard 46, mouse interface 123 to pointing device 47, spectrophotometer interface 124 to spectrophotometer 70, and printer interface 125 to printer 50.

Main memory 116 interfaces with computer bus 114 so as to provide RAM storage to CPU 113 during execution of software programs such as an operating system, application programs and device drivers. More specifically, CPU 113 loads computer-executable process steps from fixed disk 45 into a region of main memory 116. CPU 113 then executes the stored process steps from main memory 116 in

order to execute software programs such as an operating system, application programs and device drivers. Data such as color images can be stored in main memory 116, where the data can be accessed by CPU 113 during the execution of computer-executable process steps that use or alter the data.

As also shown in Figure 2, fixed disk 45 contains operating system 130, application programs 131, such as color appearance modeling applications that include a color management module, and various device drivers 132, including a spectrophotometer driver and a printer driver. Fixed disk 45 also stores process steps 133 according to the invention, for adjusting color appearance models based on neutral colors for the output device.

Adjustment of a color appearance model according to the present invention will now be described in more detail with regard to Figures 3 to 6. Although the following description is applied in the context of a color printer, it should be understood that the present invention is not limited in its application to printers, but may be applied equally for other color output devices, such as CRT displays.

Figure 3 is a flowchart depicting the process of adjusting the color appearance model according to the present invention. The process steps shown in Figure 3 are computer executable process steps executable in computing equipment 40 and stored on a computer-readable medium such as disk 45. The process generally contains four broad steps, which are broken down into more detail in Figure 3: generating a forward model, here in the form of a multi-dimensional color look-up table (CLUT) that maps color values from device-dependent space to device-independent color appearance space; finding the mismatch between device neutrals and the

device neutral axis in the color appearance space,
which is done by generating a one-dimensional look-
up table of the device-neutral color shades;
adjusting the forward mapping based on the mismatch,
5 which is performed by adjusting each entry in the
CLUT to match the device's color-neutral axis; and
inverting the adjusted forward mapping to map from
device-independent color appearance space back to
device-dependent space.

10 To begin adjustment of the color appearance
model, in step S301, sample color patches are
printed out by printer 50 using its print driver.
Initially, it should be understood that most color
printer drivers are generally capable of printing in
15 response to 256 levels of colorant for each color
(C,M,Y,K). Although the present invention could be
applied with regard to four colors (C,M,Y,K), the
present description will be limited to three colors
(C,M,Y). Therefore, it is possible to print 256(C)
20 x 256(M) x 256(Y) = 16,777,216 different color
combination patches. However, this number of color
patches is not manageable and is commonly reduced to
a representative sample of color patches, with any
necessary remaining values being obtained by
25 interpolation. Most commonly, a 9 x 9 x 9 sample is
used with a constant interval of 32. Therefore, the
resultant color patch printout is a 9(C) x 9(M) x
9(Y) = 729 different color patches, with the
colorant levels selected as 0, 32, 64, 96, 128, 160,
30 192, 224, and 255.

As shown in Figure 3, an n x m array of
color patches are printed out at the aforementioned
uniform intervals of colorant, i.e. an interval of
32. The array may, for example, be a 9(n) x 81(m)
35 array, or any combination of n and m that equals 729
color patches. Each color patch has a different
level of colorant for each color ink. For instance,

patch 101 may be a C=M=Y=0 color patch, patch 102 may be a C=32, M=Y=0 color patch, and so on, with patch 103 being a C=M=Y=255 color patch. The resulting printout is an array of color patches that provides a representative spectrum of the printer's color characterization in device-dependent space (printer color space).

Once the printer, or other output device, has generated the color patches according to the foregoing, measurements are taken of each color patch using a spectrophotometer, such as spectrophotometer 70, or some other color value measuring device, with the measurements being transformed as needed to obtain color appearance space values for each color patch (step S302). Utilizing well-known techniques, color appearance space values, such as CIECAM97s values for lightness (J), hue (h) and chroma (C), are obtained for each color patch. The resultant values represent a conversion from device coordinate space, such as CMY, to color appearance space, such as JCh (cylindrical coordinates for color appearance space), for each color patch. More preferably, however, rectangular coordinates are obtained. Therefore, if needed, the JCh values are preferably converted to Jab values (rectangular coordinates for color appearance space). In Jab space, (J) represents lightness with a and b representing hue and chroma (where "a" roughly represents red/green and "b" roughly represents blue/yellow). The resultant conversion provides a forward mapping from device-dependent space, such as CMY, to Jab device-independent color appearance space.

This resulting mapping is then utilized to formulate a multi-dimensional color look-up table (CLUT) that converts from device dependent color space (here, from CMY values) to device independent

color appearance space (here, from Jab values) (step S303). An example of the resulting CLUT is shown in Figure 5. As shown, the CLUT is a three-dimensional (C,M,Y) table containing $9(C) \times 9(M) \times 9(Y) = 729$ cells. Each cell corresponds to one of the aforementioned color patches and contains the Jab values obtained for that patch in step S302.

The next step in the color appearance model adjustment process is to find the mismatch, in color appearance space, between colors that are perceived by a viewer as device neutral, and the device neutral axis of the color appearance space. In this embodiment, a one-dimensional look-up table is generated that contains the Jab coordinates of device-neutrals as perceived by a viewer. This process is broken down into three steps in Figure 3: steps S304, S305 and S306. To generate the one-dimensional look-up table, a viewer, such as a color scientist or an engineer, analyzes sample color patches printed by the device in a variety of viewing conditions. The conditions may comprise various surround, media types, lighting conditions, etc. The viewer then identifies those color patches which he/she perceives as being neutral (step S304). It should be noted that the viewer need not analyze all of the sample patches in the $9 \times 9 \times 9 = 729$ sample patch grid. The viewer could merely select two sample patches, preferably samples that he/she perceives as pure white and pure black, such as patches 101 and 103 as shown in Figure 4. Alternatively, the viewer could select a few neutral patches such as the five patches depicted in Figure 7 spaced nearly equally in terms of lightness. Usually the values for these patches are obtained by measurement, but values for the remaining cells needed to fill in the one-dimensional look-up table would be obtained by interpolation.

Once the viewer identifies samples that he/she perceives as being neutral, the color appearance space values for the sample neutral patches are extracted from the forward model multi-dimensional color look-up table. This process comprises obtaining the CMY values used to print the selected neutral color, locating a sample point having the CMY values in the CLUT, and extracting the Jab values for the sample point from the table. It should be noted that the CMY values for the sample patch may not correspond exactly to the interval values used to generate the CLUT. In such a case, the Jab values for the sample point will not be readily available, but instead would have to be obtained by interpolation from neighboring interval points.

Consider an example where the viewer selects a patch that he perceives as neutral that was printed with a CMY of 32,32,32. Using these values, the CLUT is accessed to extract the Jab values directly from the cell corresponding to a CMY value of 32,32,32. Since the user selected a patch that was printed with a CMY value corresponding exactly to the interval values contained in the CLUT, the Jab values are obtained directly from the CLUT.

However, it is more often the case that the viewer will select a sample patch that he/she perceives as neutral that does not correspond exactly to the interval values contained in the CLUT. For example, the user may select a color patch that was printed with CMY values of 28,32,36 rather than 32,32,32. Therefore, the Jab values for the 28,32,36 sample patch cannot be directly extracted from the CLUT, but must be obtained by interpolation. Suitable interpolation includes trilinear and tetrahedral interpolation.

Once the Jab values for the sample patch are extracted, either directly from the CLUT or by interpolation, these values are entered in a one-dimensional look-up table (step S306). This extraction process and entering of the Jab values into the one-dimensional look-up table is illustrated in Figure 6. As shown, the Jab values for the cell corresponding to a CMY of 0,0,0 are entered into the one-dimensional table that contains the three values, J, a and b. Note that cell 0,0,0 would be expected to be perceived as a neutral color (pure white) since no colorant at all is printed for this patch.

The foregoing extraction process continues to obtain Jab values for each color patch identified by the viewer as device neutral.

Ideally, the values of a and b in the one-dimensional look-up table would be $a=b=0$ for all lightness levels, meaning that the sample point selected by the viewer falls directly on the neutral axis. However, this is generally not the case and instead, the Jab values for the sample patch lies off the neutral axis. Because the sample point lies off the neutral axis, both of the extracted a and b values will have some value other than zero. The extent to which both a and b in the one-dimensional look-up table are not zero represents a mismatch from the neutral axis for that lightness level.

It is an object of the invention to adjust the CLUT for the mismatch. For example, Figure 7 shows an example where Jab values for sample points of device neutrals, such as points 201, 202, 203 and 204, are mismatched and do not fall on the neutral axis of the color appearance space, even though they ideally should.

The mismatch values contained in the one-dimensional look-up table are used to adjust the

values in the multi-dimensional color look-up table
(step S307). For each cell of the CLUT, the
lightness (J) from the Jab triplet stored in the
cell is obtained, and the corresponding lightness
5 (J) value is found in the one-dimensional table, or
is obtained from the one-dimensional table by
interpolation on the table. Then, based on the a
and b values from the one-dimensional table, the a
and b values from the Jab triplet in the cell are
10 adjusted. For example, where a cell in the CLUT has
a lightness level of 60, as illustrated in Figure 7,
the one-dimensional look-up table is accessed to
obtain the a and b values for a lightness level of
60, using interpolation if needed. Then, the a
15 value corresponding to a lightness level of 60 in
the one-dimensional look-up table is subtracted from
the a value contained in the cell in the CLUT.
Likewise, the b value corresponding to a lightness
level of 60 in the one-dimensional look-up table is
20 subtracted from the b value contained in the cell in
the CLUT. The process continues for all cells
within the CLUT until all cells have been adjusted.
The result is a CLUT that has been adjusted so that
the viewer's perception of neutral colors matches
25 the neutral axis.

This adjusted table is then inverted to
obtain a reverse mapping back from device-
independent color appearance space to device-
dependent space for color output purposes (step
30 S308). The adjusted forward table and the inverted
table are then inserted into a color management
module to be used by an end user for printing
operations (step S309).

In alternative embodiments, rather than
35 fully adjusting the a and b values of each and every
cell, a partial adjustment of the values is
performed. The inventors herein have found that a

full adjustment of the values according to the foregoing embodiment, particularly for some highly chromatic colors, sometimes leads to a reduction in the colorfulness of colors having high chroma values. Therefore, this second embodiment performs only partial adjustment for some of the values in the CLUT.

The partial adjustment may be performed in various ways, including partial adjustment as either a linear or non-linear function of some variable. For instance, the partial adjustment may be a linear or non-linear function based on variables such as chroma and lightness.

The present embodiment utilizes an inverse proportionality algorithm to perform partial adjustment based on either chroma or lightness or both in combination. For chroma, the embodiment adjusts those colors closest to the neutral axis so that they match the neutral axis, while colors falling farthest from the neutral axis are adjusted proportionally less. In other words, for partial adjustment based on chroma, the invention adjusts those cells corresponding to neutral colors according to the foregoing description so that they fall exactly on the neutral axis. However, with regard to cells corresponding to chromatic colors, an inverse proportionality adjustment is made.

In more detail, the more chromatic a color is, the farther it lies away from the neutral axis. The embodiment provides for proportionally adjusting the a and b values, depending on their initial chroma values. For example, colors that are nearest the neutral axis have low a and b values while colors farthest from the neutral axis have high a and b values. Total distance from the neutral axis can be calculated as the square root of $a^2 + b^2$, and those colors with a small distance are adjusted in

greater proportion so that they fall closer to the neutral axis, while those colors with a high distance are adjusted less so that they retain their chroma.

5 By way of example, consider sample points
203, 204 and 205 shown in Figure 7. Point 203 is a
neutral shade as perceived by the viewer. As such,
point 203 will be adjusted by subtracting the entire
mismatch values, therefore adjusting it to lie on
10 the neutral axis. However, points 205 and 206 would
be adjusted inversely proportionally, depending on
their level of chromaticity. In this case, point
205 is somewhat chromatic but is close to the
neutral axis. Therefore, point 205 would be
15 adjusted nearly as much, but nevertheless less than
point 203 so that it lies nearer the neutral axis.
However, point 206 is very chromatic and lies far
from the neutral axis. As such, point 206 would be
adjusted in a lesser proportionality so that it
20 retains more of its chroma. This inverse
proportionality algorithm is applied to all cells in
the CLUT, thus rendering an adjusted CLUT. As with
the previous embodiment, the adjusted CLUT is then
inverted to convert from color appearance space back
25 to device-dependent space, and both the adjusted and
the inverted CLUT can then be utilized by a color
management program.

 In an alternate embodiment of partial
adjustment, the partial adjustment is based on
30 lightness. In this embodiment, a proportionality
algorithm is utilized to adjust points with higher
lightness values in lesser proportions, and points
with lower lightness values in greater proportions.

 Referring again to Figure 7, consider
35 sample points 206 and 207. As shown, points 206 and
207 have equivalent chroma values (distance from the
neutral axis), but have different lightness values

(J values). Utilizing the proportionality algorithm of the present embodiment, point 207, which has a high lightness value, would be adjusted proportionally less as compared to point 205, which has a low lightness value, which would be adjusted proportionally more. Again, the proportionality algorithm is applied to all cells in the CLUT, with the resulting adjusted CLUT being inverted so that both CLUTs can be used in a color management program.

Partial adjustment based on a combination of lightness and chroma are also possible.

The invention has been described with respect to particular illustrative embodiments. It is to be understood that the invention is not limited to the above-described embodiments and that various changes and modifications may be made by those of ordinary skill in the art without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A method for adjusting the representation of a device's color gamut in color appearance space, comprising the steps of:

performing forward mapping of sample colors from a device-dependent space to a device-independent color appearance space to obtain forward-mapped device-independent values;

obtaining mismatch values for perceived device-neutrals, each mismatch value being a difference between a forward mapped value for the device-neutral and a neutral axis of the color appearance space; and

adjusting each forward-mapped device-independent value by utilizing the obtained mismatch value for each corresponding lightness level of device-neutrals in order to obtain an adjusted forward mapping.

2. A method according to Claim 1, wherein the forward mapping is a forward look-up table obtained by converting measurements of color samples from the device to device-independent color appearance space.

3. A method according to Claim 1, wherein mismatch values are obtained by extracting device-independent color appearance space values for device-neutrals and generating a one-dimensional look-up table that maps a color-neutral axis for a range of lightness values.

4. A method according to Claim 1, wherein the device-independent values are Jab values.

55077-9624450

11. A method according to Claim 1, wherein the adjusting of the forward-mapped device-independent values is a partial adjustment performed in either a linear or non-linear manner.

13. A method according to Claim 12,
wherein the partial adjustment is performed in
inverse proportionality.

15. A method according to Claim 14,
wherein the partial adjustment is performed in
inverse proportionality.

16. A method according to Claim 11,
wherein the partial adjustment is based at least in
part on both chroma and lightness.

17. A method according to Claim 16, wherein the partial adjustment based on chroma is performed in inverse proportionality, and the partial adjustment based on lightness is performed in inverse proportionality.

18. A method according to Claim 1, wherein the mismatch values are obtained for two device-

19. Computer-executable process steps for adjusting the representation of a device's color gamut in color appearance space, comprising the steps of:

obtaining mismatch values for perceived device-neutrals, each mismatch value being a difference between a forward mapped value for the device-neutral and a neutral axis of the color appearance space; and

20. Computer-executable process steps according to Claim 19, wherein the forward mapping is a forward look-up table obtained by converting measurements of color samples from the device to device-independent color appearance space.

21. Computer-executable process steps according to Claim 19, wherein mismatch values are obtained by extracting device-independent color appearance space values for device-neutrals and generating a one-dimensional look-up table that maps a color-neutral axis for a range of lightness values.

35. Computer-executable process steps according to Claim 34, wherein the partial adjustment based on chroma is performed in inverse proportionality, and the partial adjustment based on lightness is performed in inverse proportionality.

36. Computer-executable process steps according to Claim 19, wherein the mismatch values are obtained for two device-neutrals with any remaining values being obtained by interpolation.

37. An apparatus that processes color image data, comprising:

a program memory for storing executable process steps for adjusting the representation of a device's color gamut in color appearance space, wherein the executable process steps include: (a) performing forward mapping of sample colors from a device-dependent space to a device-independent color appearance space to obtain forward-mapped device-independent values; (b) obtaining mismatch values for perceived device-neutrals, each mismatch value being a difference between a forward mapped value for the device-neutral and a neutral axis of the color appearance space; and (c) adjusting each forward-mapped device-independent value by utilizing the obtained mismatch value for each corresponding lightness level of device-neutrals in order to obtain an adjusted forward mapping; and

a processor for executing the process steps stored in the program memory.

38. An apparatus according to Claim 37, wherein the forward mapping is a forward look-up table obtained by converting measurements of color samples from the device to device-independent color appearance space.

556TFT 96CE450

39. An apparatus according to Claim 37, wherein mismatch values are obtained by extracting device-independent color appearance space values for device-neutrals and generating a one-dimensional look-up table that maps a color-neutral axis for a range of lightness values.

40. An apparatus according to Claim 37, wherein the device-independent values are Jab values.

41. An apparatus according to Claim 37, wherein the adjustment of each device-independent value comprises obtaining "a" and "b" coordinates for a device-neutral having a lightness value equivalent to the device-independent value, and subtracting the "a" coordinate of the device-neutral from a corresponding "a" coordinate of the device-independent value and the "b" coordinate of the device-neutral from a corresponding "b" coordinate of the device-independent value.

42. An apparatus according to Claim 37, wherein the adjustment of each device-independent value comprises obtaining "a" and "b" coordinates for a device-neutral having a lightness value equivalent to the device-independent value, and adjusting the "a" and "b" values by means of a linear or non-linear function of the device-neutral "a" and "b" values.

43. An apparatus according to Claim 37 further comprising the step of inverting the resulting adjusted forward mapping from device-independent color appearance space to device-dependent space.

962450

45. An apparatus according to Claim 44,
wherein a computing device utilizes the color
management module to perform color data management
to output an image.

47. An apparatus according to Claim 37, wherein the adjusting of the forward-mapped device-independent values is a partial adjustment performed in either a linear or non-linear manner.

49. An apparatus according to Claim 48, wherein the partial adjustment is performed in inverse proportionality.

51. An apparatus according to Claim 50, wherein the partial adjustment is performed in inverse proportionality.

52. An apparatus according to Claim 47, wherein the partial adjustment is based at least in part on both chroma and lightness.

53. An apparatus according to Claim 52, wherein the partial adjustment based on chroma is performed in inverse proportionality, and the partial adjustment based on lightness is performed in inverse proportionality.

54. An apparatus according to Claim 37, wherein the mismatch values are obtained for two device-neutrals with any remaining values being obtained by interpolation.

55. A computer-readable medium on which is stored code for performing computer-executable process steps adjusting the representation of a device's color gamut in color appearance space, wherein the computer-executable process steps include: (a) performing forward mapping of sample colors from a device-dependent space to a device-independent color appearance space to obtain forward-mapped device-independent values; (b) obtaining mismatch values for perceived device-neutrals, each mismatch value being a difference between a forward mapped value for the device-neutral and a neutral axis of the color appearance space; and (c) adjusting each forward-mapped device-independent value by utilizing the obtained mismatch value for each corresponding lightness level of device-neutrals in order to obtain an adjusted forward mapping.

56. A computer-readable medium according to Claim 55, wherein the forward mapping is a forward look-up table obtained by converting

655T: 9624450

measurements of color samples from the device to device-independent color appearance space.

57. A computer-readable medium according to Claim 55, wherein mismatch values are obtained by extracting device-independent color appearance space values for device-neutrals and generating a one-dimensional look-up table that maps a color-neutral axis for a range of lightness values.

58. A computer-readable medium according to Claim 55, wherein the device-independent values are Jab values.

59. A computer-readable medium according to Claim 55, wherein the adjustment of each device-independent value comprises obtaining "a" and "b" coordinates for a device-neutral having a lightness value equivalent to the device-independent value, and subtracting the "a" coordinate of the device-neutral from a corresponding "a" coordinate of the device-independent value and the "b" coordinate of the device-neutral from a corresponding "b" coordinate of the device-independent value.

60. A computer-readable medium according to Claim 55, wherein the adjustment of each device-independent value comprises obtaining "a" and "b" coordinates for a device-neutral having a lightness value equivalent to the device-independent value, and adjusting the "a" and "b" values by means of a linear or non-linear function of the device-neutral "a" and "b" values.

61. A computer-readable medium according to Claim 55 further comprising the step of inverting the resulting adjusted forward mapping from device-

962E4450

68. A computer-readable medium according to Claim 65, wherein the partial adjustment is based at least in part on lightness.

70. A computer-readable medium according to Claim 65, wherein the partial adjustment is based at least in part on both chroma and lightness.

72. A computer-readable medium according to Claim 55, wherein the mismatch values are obtained for two device-neutrals with any remaining values being obtained by interpolation.

ABSTRACT

A system for adjusting the representation of a device's color gamut in color appearance space, comprising performing forward mapping of sample colors from a device-dependent space to a device-independent color appearance space to obtain forward-mapped device-independent values, obtaining mismatch values for perceived device-neutrals, each mismatch value being a difference between a forward mapped value for the device-neutral and a neutral axis of the color appearance space, and adjusting each forward-mapped device-independent value by utilizing the obtained mismatch value for each corresponding lightness level of device-neutrals in order to obtain an adjusted forward mapping. The adjusting of each forward-mapped device-independent value may be a full adjustment of each value, or a partial adjustment that is performed in either a linear or non-linear manner and that may be based on chroma, lightness, or both. The adjusted forward-mapping may be inverted with both the adjusted forward-mapping and the inverted adjusted forward-mapping being inserted into a color management module.

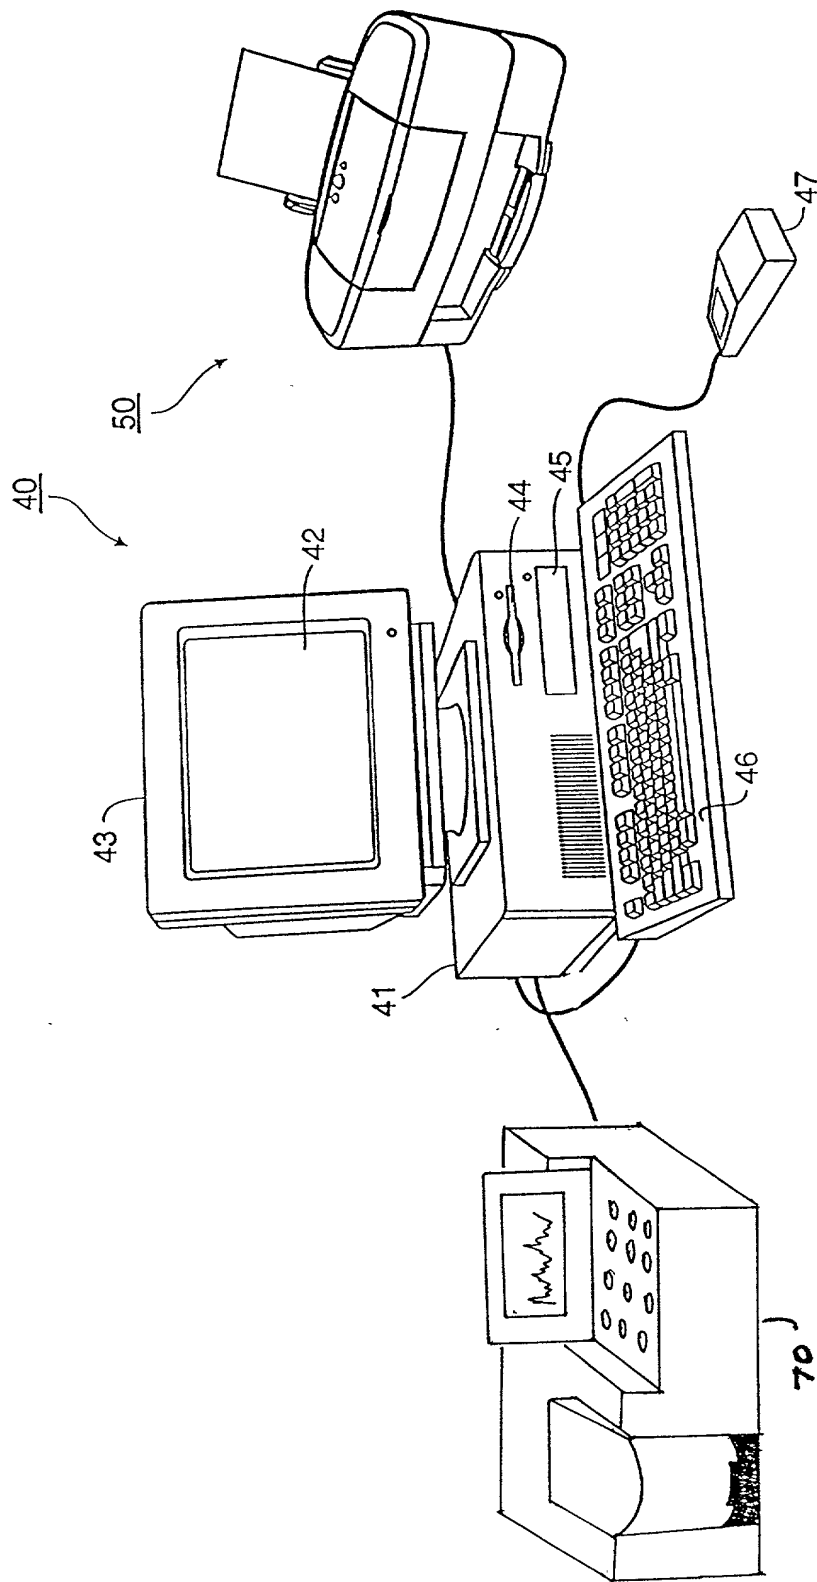


FIGURE 1

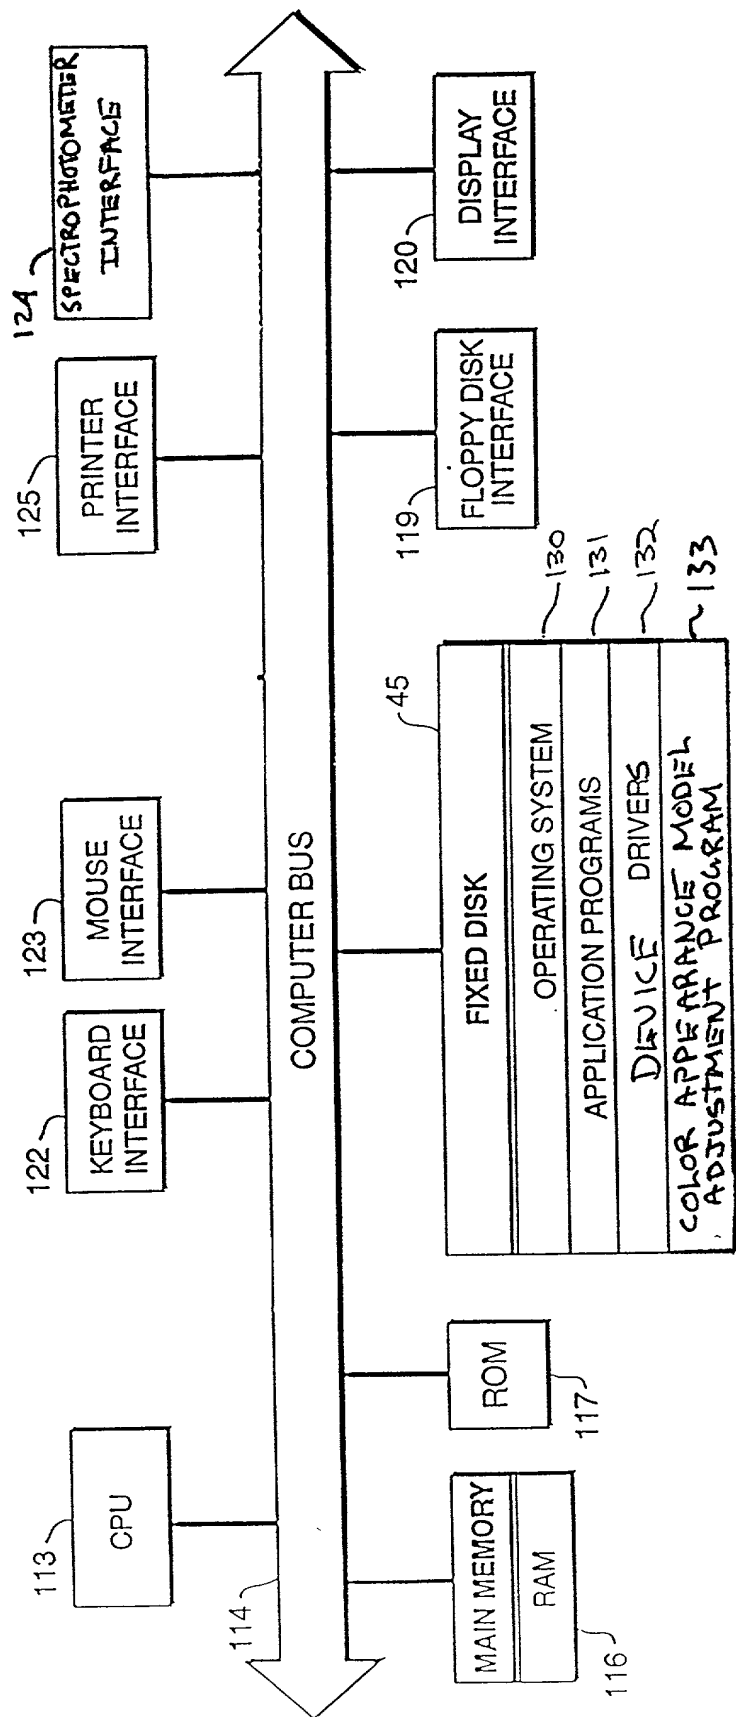


FIGURE 2

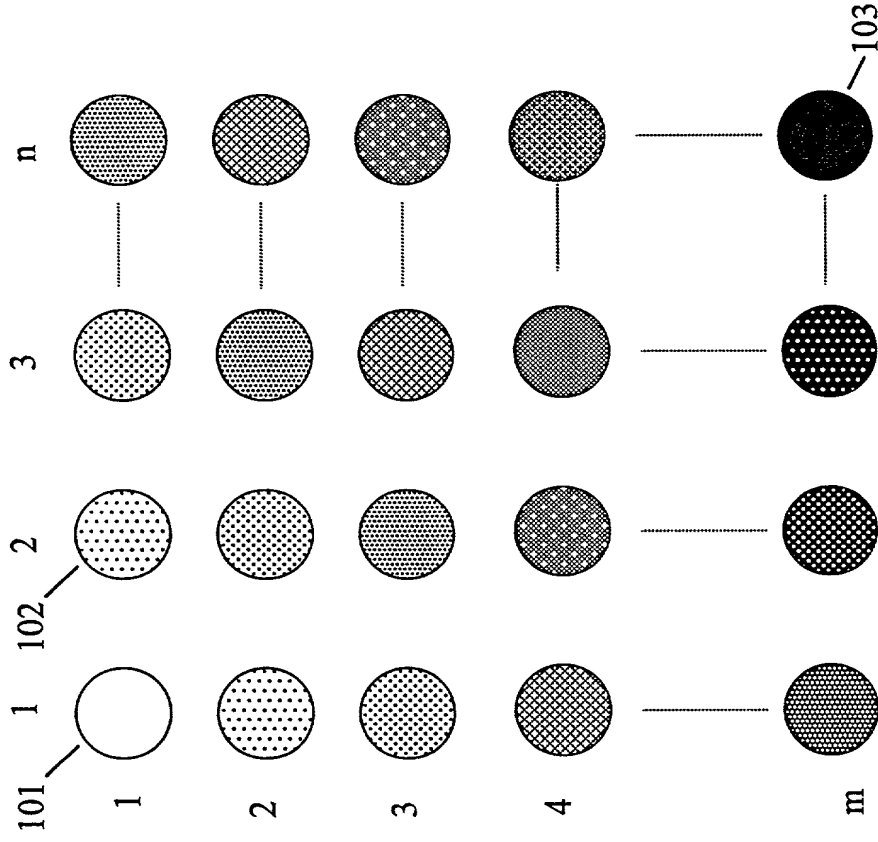


FIGURE 4

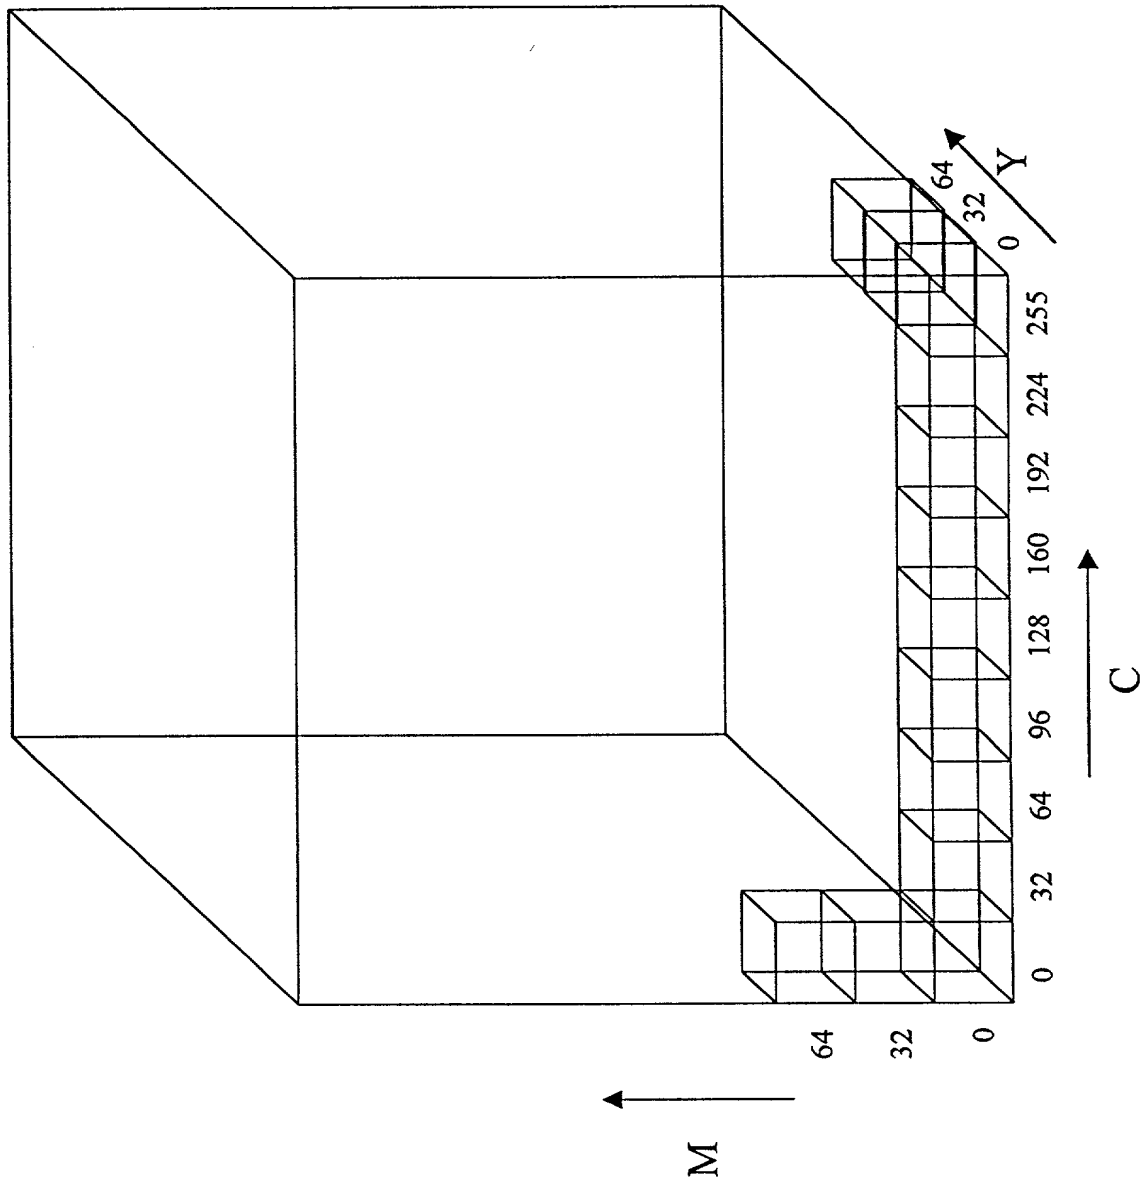


FIGURE 5

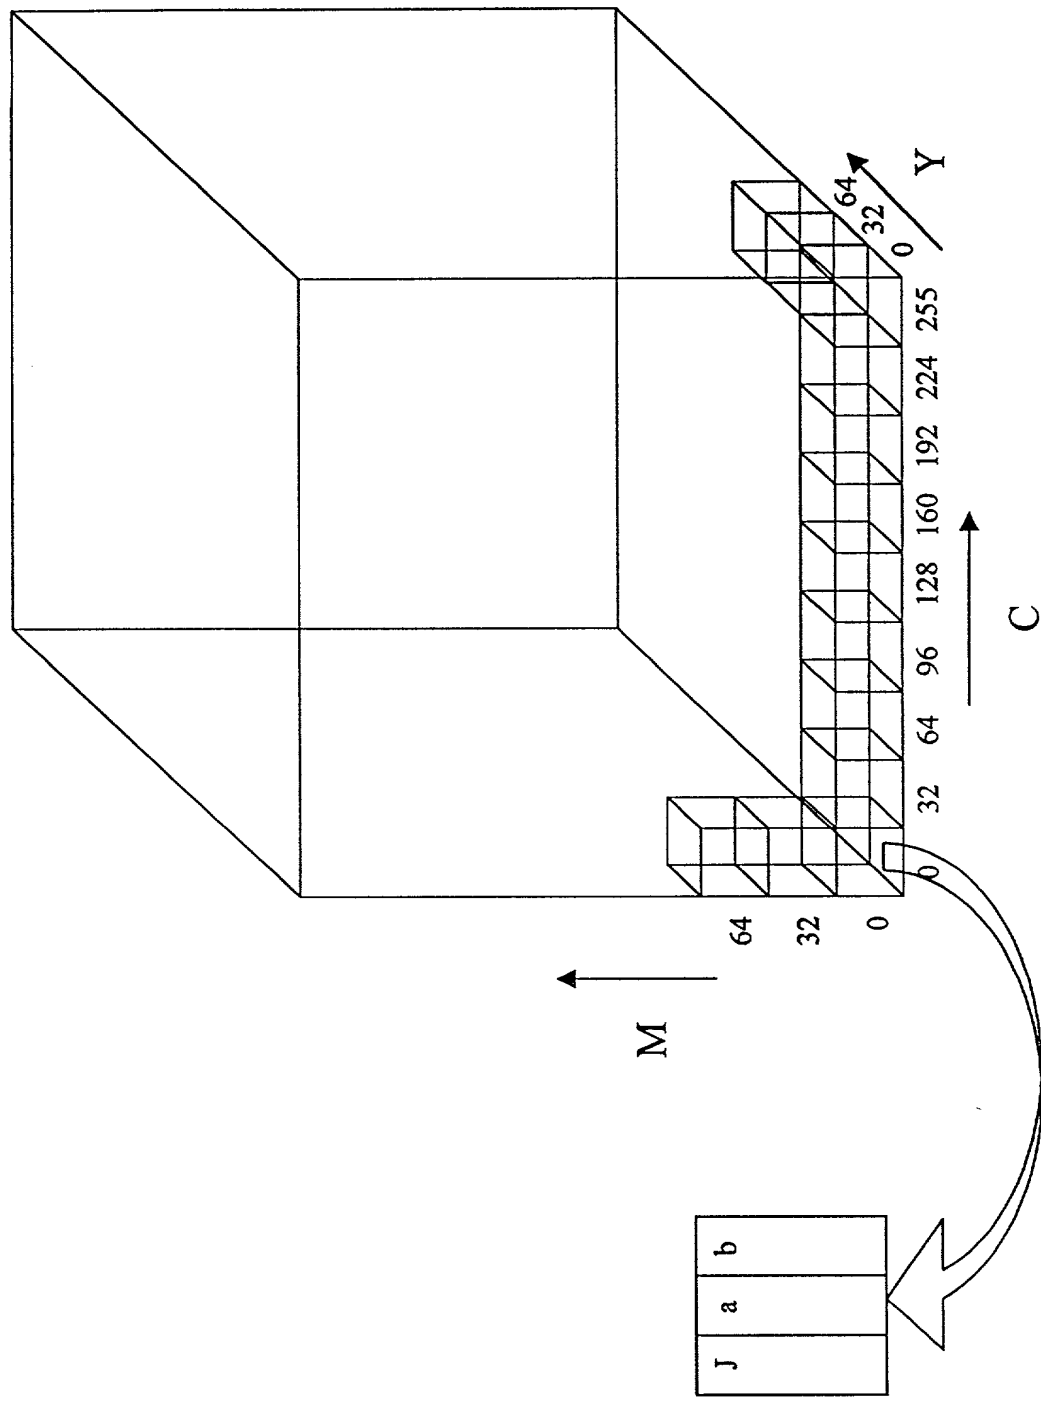


FIGURE 6

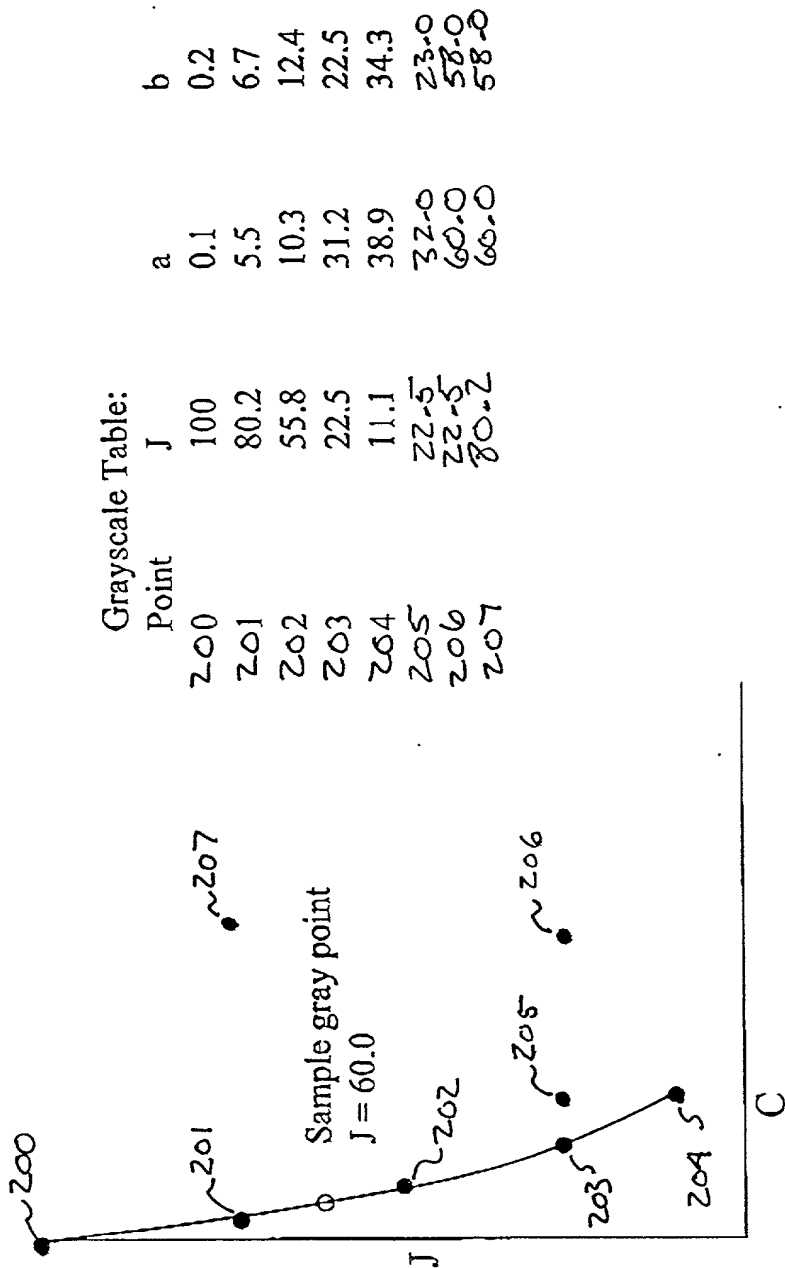


FIGURE 7